


RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm



SPECIFICATIONS

1. OPERATING CURRENT: 0.5A MAX.
2. OPERATION TEMPERATURE: -25° C TO +85° C
3. DIELECTRIC WITHSTANDING VOLTAGE: 500V_{olts} AC BETWEEN ADJACENT TERMINAL (UNMATE) 300V_{olts} AC BETWEEN ADJACENT TERMINAL (MATE)
4. INSULATION RESISTANCE: 100Mohm MIN. (UNMATED) : 10Mohm MIN. (MATED)
5. HDMI SPECIFICATION COMPLIANCE
6. 盐雾测试: 国际标准要求, 温度35°C, 浓度5%的盐水, 24H, 用清水洗净后观测, 产品无氧化、无锈蚀
7. 寿命测试: ≥10000次

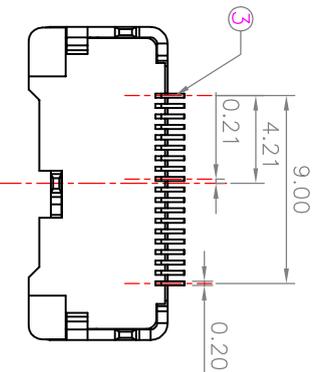

深圳市鑫南天科技有限公司

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X.X	±0.30	0000	11			1	
X.XX	±0.25	CHECKED BY:		DATE :		PART NO.	
X.XXX	±0.15	AG	2016-02-06			XNT-HDMI-1130	
X" ±2'	X.X' ±0.5"	APPROVED BY:		DATE :		MOLD NO.	
		JEFF	2016-02-07			XNT-HDMI-1130	
UNIT: mm [inch]	SCALE:1:1	SIZE: A4					SHEET NO.
							4